



Essential LEDtube

LEDtube HO 1200mm 20W 765 T8 AP I G

Essential LEDtube is an affordable LED tube that is suitable for replacing T8 fluorescent lamps. The product provides a natural lighting effect for use in general lighting applications, as well as instant energy savings – an environmentally friendly solution.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
B50L70	15000 h

Light Technical	
Color Code	765 [CCT of 6500K]
Luminous Flux (Nom)	2100 lm
Luminous Flux (Rated) (Nom)	2100 lm
Correlated Color Temperature (Nom)	6500 K
Color Consistency	<7
Color Rendering Index (Nom)	70
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	20 W
Lamp Current (Nom)	160 mA
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.5
Voltage (Nom)	220-240 V

Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	65 °C

Controls and Dimming	
Dimmable	No


Mechanical and Housing	
Product Length	1200 mm

Approval and Application	
Energy Saving Product	Yes
Energy Efficiency Label (EEL)	A+
Approval Marks	RoHS compliance KEMA Keur certificate
Energy Consumption kWh/1000 h	20 kWh


Product Data	
Full product code	871869667436900
Order product name	LEDtube HO 1200mm 20W 765 T8 AP I G
EAN/UPC - Product	8718696674369
Order code	929001277308

Essential LEDtube


Lifetime

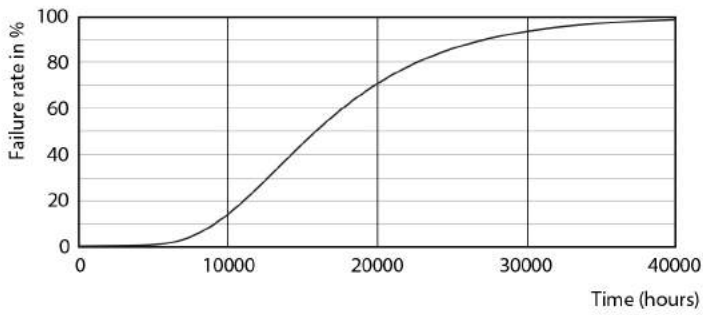


LEDtube HO 20W G13 730 T8 AP I G

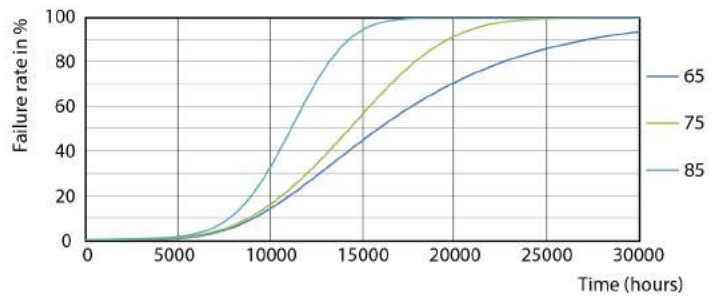


LEDtube HO 20W G13 730 T8 AP I G

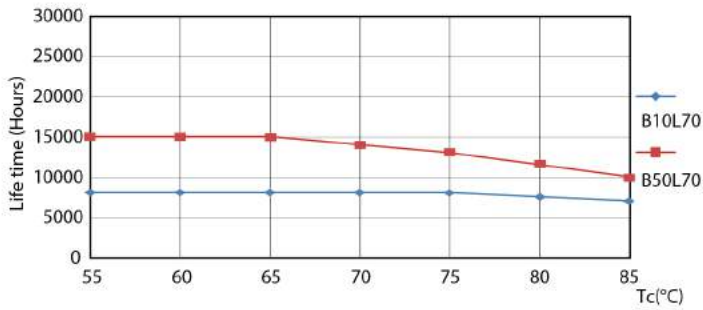

LEDtube HO 20W G13 730 T8 AP I G

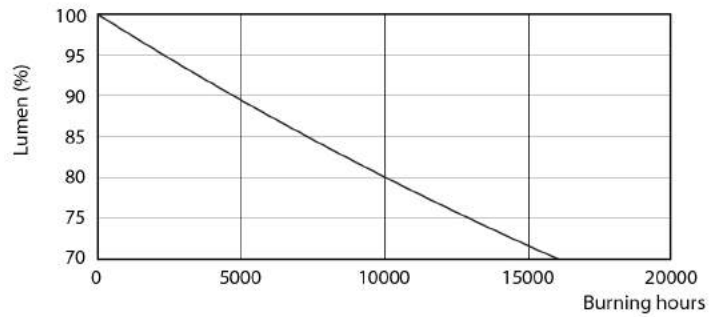

LEDtube HO 20W G13 730 T8 AP I G

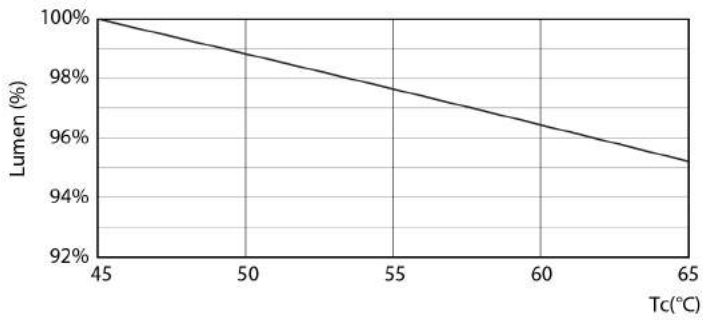

LEDtube HO 20W G13 730 T8 AP I G

