



MASTER LEDtube EM/Mains T8

MAS LEDtube 600mm HO 8W865 T8

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance which cannot be distinguished from traditional fluorescent. For those that are looking for value for money within limited budget and re-lamping efforts for better light effect and lifetime.

Product data

General Information					
Cap-Base	G13 [Medium Bi-Pin Fluorescent]				
Nominal Lifetime (Nom)	50000 h 200000X 50000 h				
Switching Cycle					
B50L70					
Light Technical					
Color Code	865 [CCT of 6500K]				
Luminous Flux (Nom)	1050 lm 1050 lm 6500 K <6				
Luminous Flux (Rated) (Nom)					
Correlated Color Temperature (Nom)					
Color Consistency					
Color Rendering Index (Nom)					
LLMF At End Of Nominal Lifetime (Nom)	70 %				
Operating and Electrical					
Input Frequency	50 to 60 Hz				
Power (Rated) (Nom)	8 W				
Lamp Current (Max)	42 mA				

Lamp Current (Min)	36 MA			
Starting Time (Nom)	0.5 s			
Warm Up Time to 60% Light (Nom)	0.5 s			
Power Factor (Nom)	0.9 220-240 V			
Voltage (Nom)				
Temperature				
T-Ambient (Max)	45 °C			
T-Ambient (Min)	-20 °C			
T-Storage (Max)	65 °C			
T-Storage (Min)	-40 °C			
T-Case Maximum (Nom)	50 °C			
Controls and Dimming				
Dimmable	No			
Mechanical and Housing				
Product Length	600 mm			

Datasheet, 2018, February 9 data subject to change

MASTER LEDtube EM/Mains T8


Approval and Application			
Energy Saving Product	Yes		
Energy Efficiency Label (EEL)	A++		
Approval Marks	TUV CE marking RoHS compliance KEMA Keu		
	certificate		
Energy Consumption kWh/1000 h	8 kWh		
Product Data			
Full product code	871869669751100		

Order product name	MAS LEDtube 600mm HO 8W865 T8 8718696697511 929001307202 1 10 929001307202			
EAN/UPC - Product				
Order code				
Numerator - Quantity Per Pack				
Numerator - Packs per outer box				
Material Nr. (12NC)				
Net Weight (Piece)	0.150 kg			

Warnings and Safety

• NOTES: The overall energy efficiency and light distribution of any installation that uses these lamps are determined by the design of the installation.


Dimensional drawing




TLED 220-240V 8W-18W 1050lm 6500K G13

Product	D1	D2	A1	A2	A3
MAS LEDtube 600mm HO			588.5 mm		
8W865 T8					


Photometric data







MASTER LEDtube EM/Mains T8

Photometric data

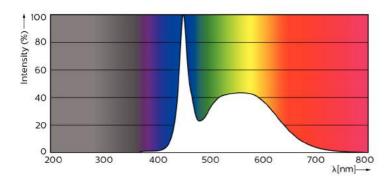

Lifetime

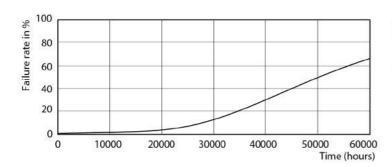

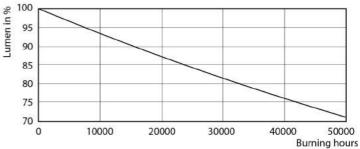



© 2018 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.