



# TUV T8

## TUV 15W SLV/25

TUV T8 lamps are double-ended UV-C 253.7 nm emitting lamps. TUV T8 lamps offer almost constant UV-C output over their complete lifetime. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- DANGER: Risk Group 3 Ultra Violet product. These lamps emit high-power UV radiation that can cause severe injury to skin and eyes. Avoid eye and skin exposure to unshielded product. Use only in an enclosed environment which shields users from the radiation.
- Plants and/or materials that are exposed to UV-C and/or ozone for a long time may become damaged and/or discolored.

### Product data


General information		Voltage (Nom)		55 V	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]				
Main Application	Disinfection	<b>Mechanical and housing</b>			
Useful Life (Nom)	9000 h	Cap-Base Information	2 Pins		
System Description	-	Bulb Shape	T26 [ T 26mm]		
<b>Light technical</b>		<b>Approval and application</b>			
Color Code	TUV	Mercury (Hg) Content (Nom)	2.0 mg		
Color Designation	- [ Not Specified]	<b>UV</b>			
Depreciation at Useful Lifetime	12 %	UV-C Radiation at 100 hr	4.9 W		
<b>Operating and electrical</b>		<b>Product data</b>			
Power (Nom)	15.5 W	Full product code	871150072617940		
Lamp Current (Nom)	0.335 A	Order product name	TUV 15W SLV/25		

# TUV T8

EAN/UPC - Product	8711500726179
Order code	928039004005
Numerator - Quantity Per Pack	1
Local code description	DESINFECTATION FLUORESCENT LAMPS
Numerator - Packs per outer box	25

Material Nr. (12NC)	928039004005
Net Weight (Piece)	65.000 g


## Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
TUV 15W SLV/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

## TUV 15W SLV/25

## Photometric data

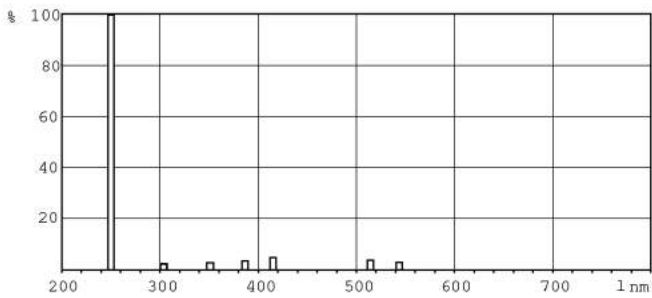

XDPB\_XUTUVTLD-Spectral power distribution B/W

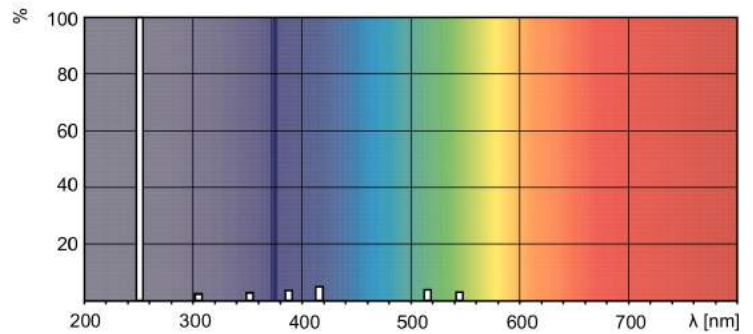

XDPO\_XUTUVTLD-Spectral power distribution Colour

