
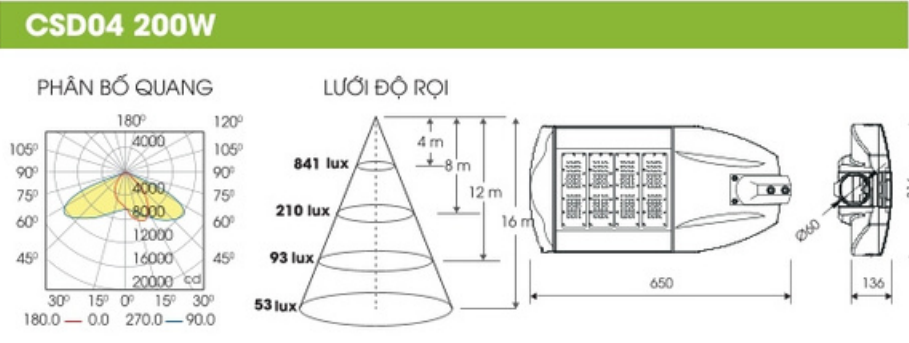
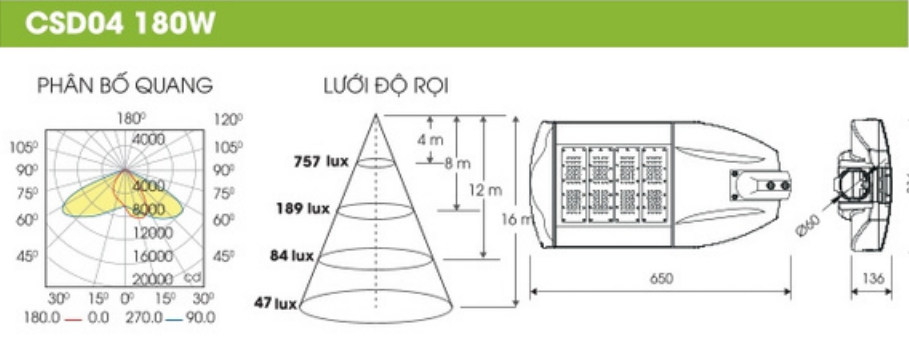
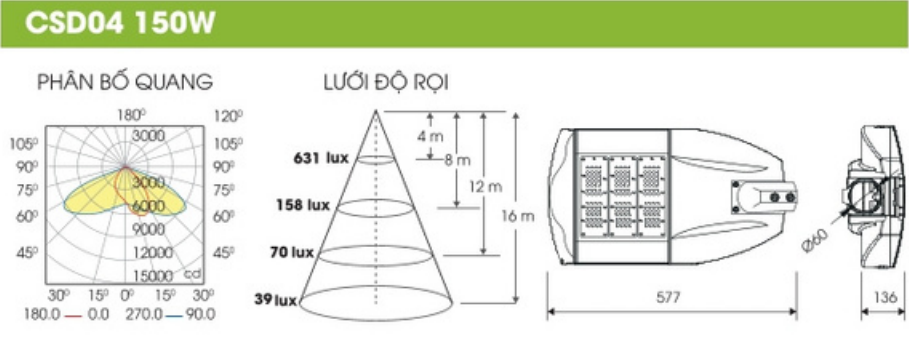


ĐÈN LED CHIẾU SÁNG ĐƯỜNG 04

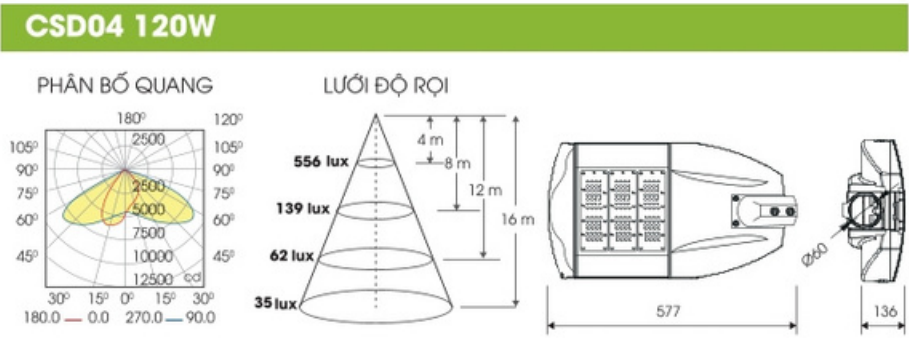

Model	Công suất	Dải điện áp hoạt động	Hệ số công suất	Hiệu suất sáng	Quang thông	Nhiệt độ màu	Khả năng chịu xung sét	Chỉ số hoàn màu	Tuổi thọ	Cấp bảo vệ	Đường kính lỗ cột đèn	Kích thước (DxRxH)
	W	V		lm/W	lm	K	kV		Giờ		mm	mm
CSD04 120W	120	100÷277	0.95	130	15600	4000/5000	10	≥70	50000	IP66,IK10	Ø60	316x136x577
CSD04 150W	150	100÷277	0.95	130	19500	4000/5000	10	≥70	50000	IP66,IK10	Ø60	316x136x577
CSD04 180W	180	100÷277	0.95	130	23400	4000/5000	10	≥70	50000	IP66,IK10	Ø60	316x136x650
CSD04 200W	200	100÷277	0.95	130	26000	4000/5000	10	≥70	50000	IP66,IK10	Ø60	316x136x650